

PV-AGP

Depth Sensor




DEPTH

Depth sensor up to 100 msw (10 BarG), with sealed diaphragm and all wet parts in 17-4 PH stainless steel (FKM Elastomer-Standard seal material) high stability and low temperature drift, with an output 4 to 20 mA.

Performance

Long Term Drift 0.1% FS/ year non-cumulative | Accuracy $\pm 0,25\%$ FS

Thermal Error $\pm 1\%$ typical /100°C | Zero tolerance $\pm 0,5\%$ of spam | Spam tolerance $\pm 0,5\%$ of spam

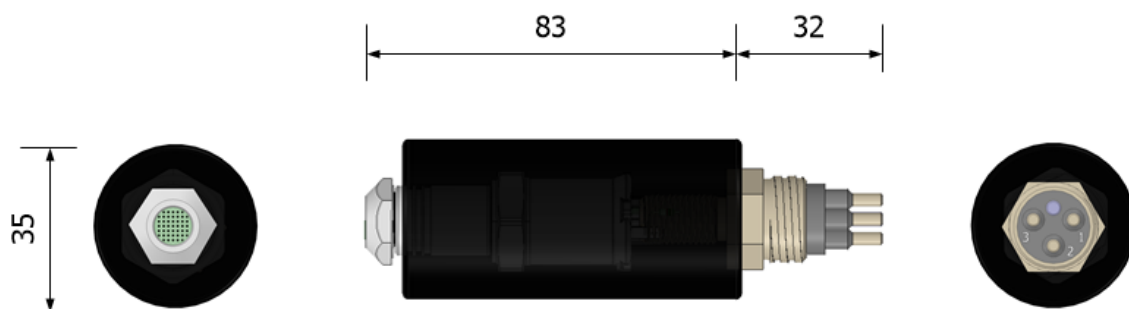

PD-APGTC-1 Specifications

Connector type: MCBH-3M-SS-SC

Cable: MCIL-3F 30cm

Locking Sleeve – MCDLS-F

Pinout

Pin 1 - Power 12...24Vdc

Pin 2 - Shield

Pin 3 - Output Signal (4-20mA)

The company **reserves the right to change** the specification **without prior notice**.